
## **F-Type Wall Plate**

## PRODUCT SPECIFICATION

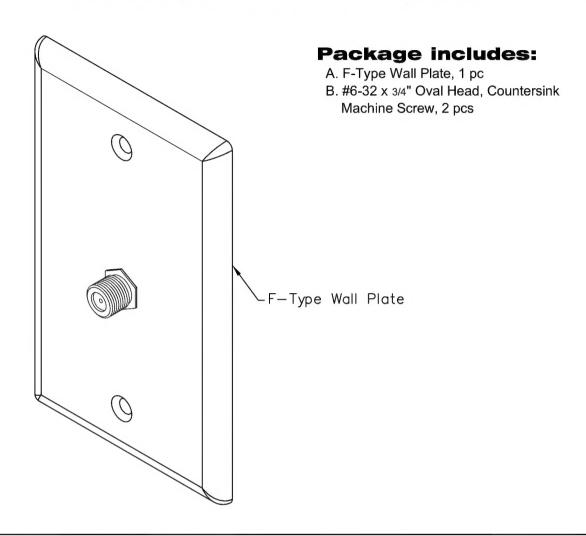


## **Features and Benefits:**

- . Configured to fit standard single gang outlet box
- Designed for all audio and video applications to the work area for commercial or residential applications
- Gold plated F-Type connector for improved performance with superior signal quality with minimal noise
- Designed to use with both RG6 and RG59 coaxial cables on the rear side
- Rear threaded F-Type connector for secure in-wall connections
- Rugged and durable construction
- · Available in ivory and white
- ANSI/TIA-568-C and UL 1863 compliant

WALL PLATE, F-TYPE			<b>SEC</b>
ITEM NO.	IC630EG0XX	REV. A	Premium <b>Products</b>
DWG NO.	PS630EG000	PAGE NO. 1	Proven <b>Performance</b> Competitive <b>Prices</b>

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr., Suite D., Fullerton, CA 92831 \* www.icc.com

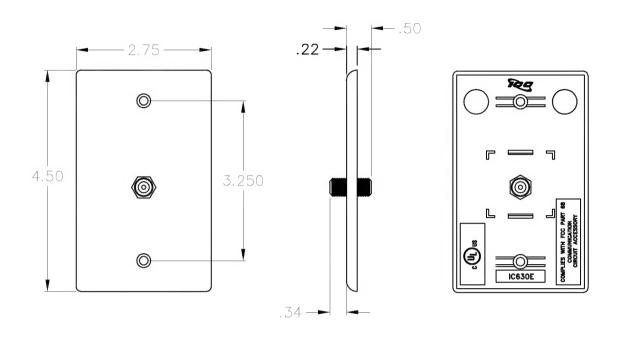

## **NOTE: UNLESS OTHERWISE SPECIFIED**

- 1. FACEPLATE:
  - A. MATERIAL: ABS, UL 94V-0
  - B. COLOR: XX: IV-IVORY & WH-WHITE
- 2. F-TYPE FEMALE-TO-FEMALE CONNECTOR:
  - A. MECHANICAL:
    - -MATERIAL: BRONZE WITH 3 MICRON GOLD PLATING
    - -HOLDING FORCE > 80 GRAMS
    - -F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A
  - B. ELECTRICAL:
    - -RETURN LOSS OF -20 dB MAX
    - -FREQUENCY RANGE DC -1.5 GHZ
    - -CONTACT RESISTANCE < 10 MOHM
    - -INSULATION RESISTANCE > 5000 MOHM
    - -INSERTION LOSS < 0.3 dB

CULUS FILE NO. 125268

WALL PLATE, F-TYPE			<b>Sec</b>
ITEM NO.	IC630EG0XX	REV. A	<u>Premium Products</u>
DWG NO.	PS630EG000	PAGE NO. 2	<u>Proven<b>Performance</b></u> <u>Competitive<b>Prices</b></u>

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr. Suite D, Fullerton, CA 92831 \* www.icc.com